

MASTERBUILT®

Ash Grate Instruction Sheet




CAUTION



- Always remove plug from outlet before servicing your grill.
- Make sure your grill has fully cooled to avoid burns.
- Some components may have sharp edges. Use caution to avoid injury.

GSG MODELS 600, 1150, XT

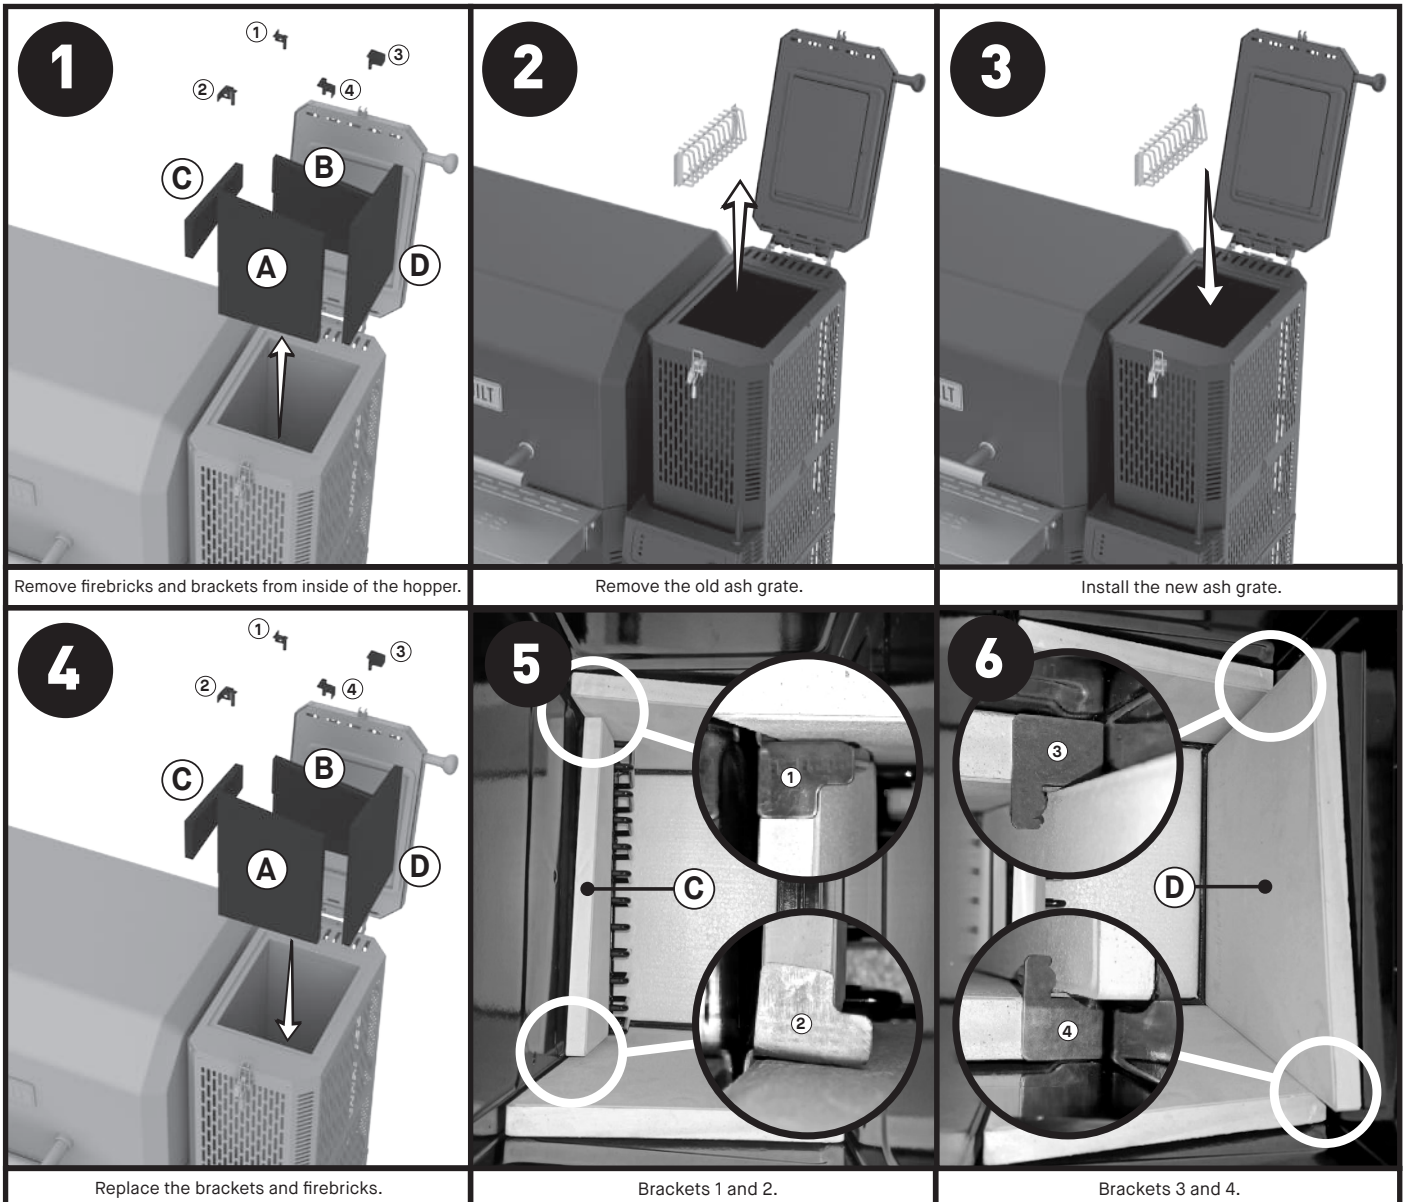


GSG MODELS 800, 900, 1050




Remove screws from hopper heat shield.



Remove lid latch and hopper door.

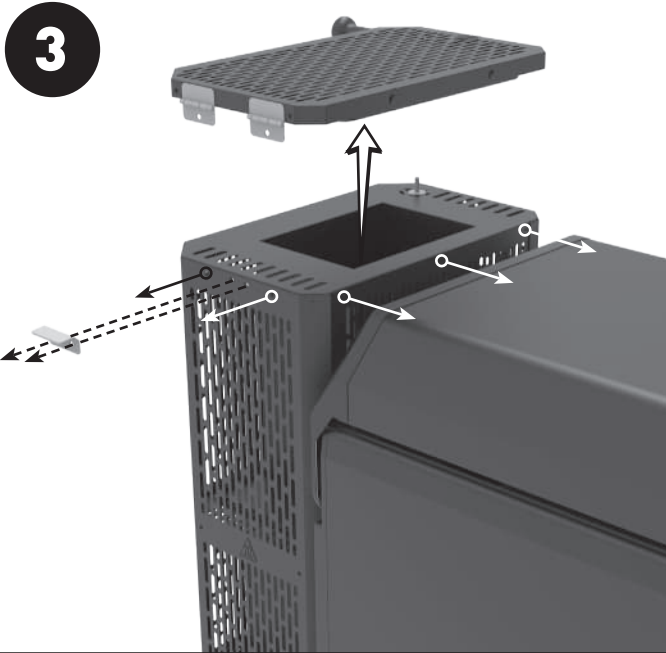


Remove the hopper lid.

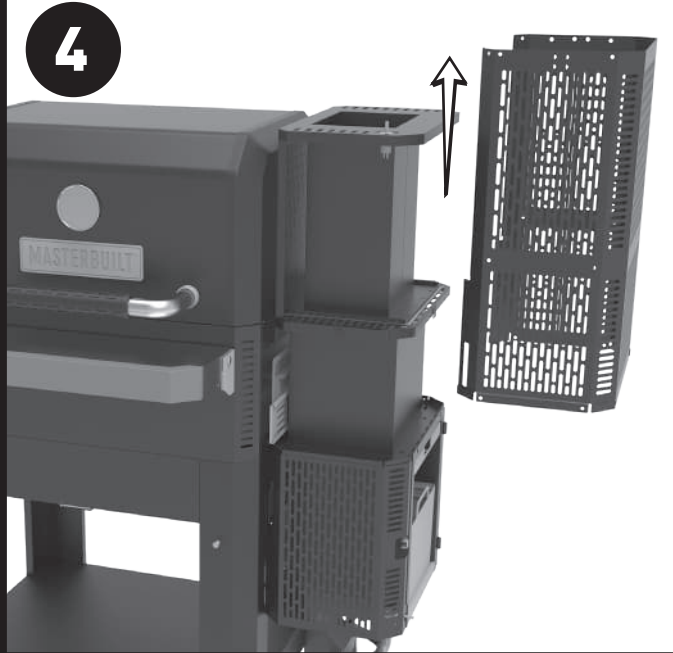


Remove the hopper heat shield.


GSG MODELS 800, 900, 1050

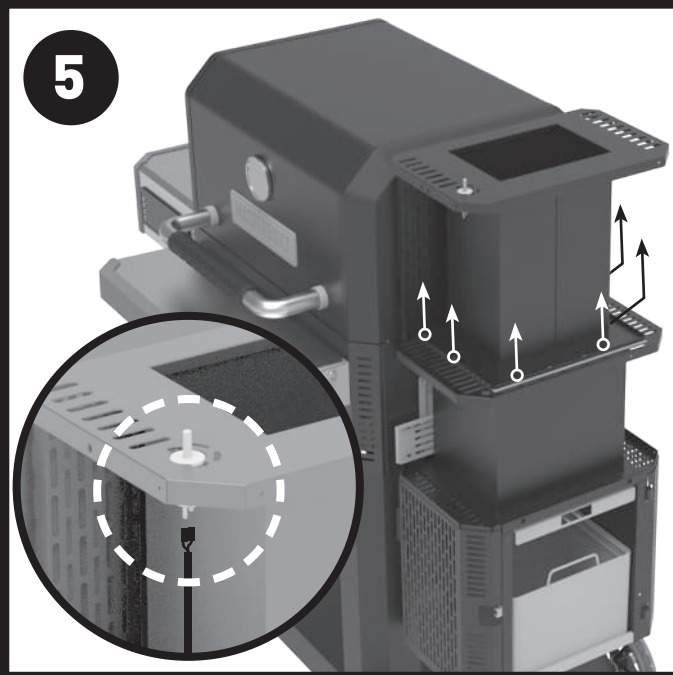

Remove upper hopper screws.
Detach wire from the lid switch.

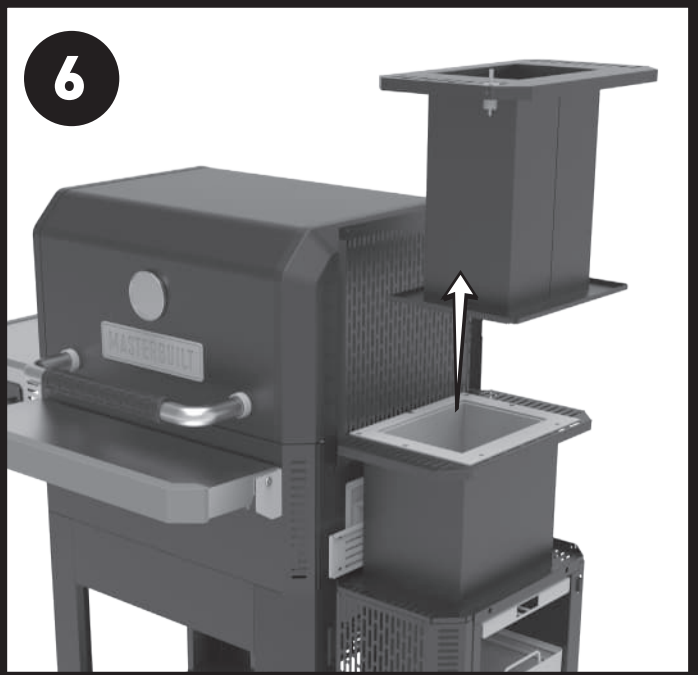

Remove upper hopper assembly.

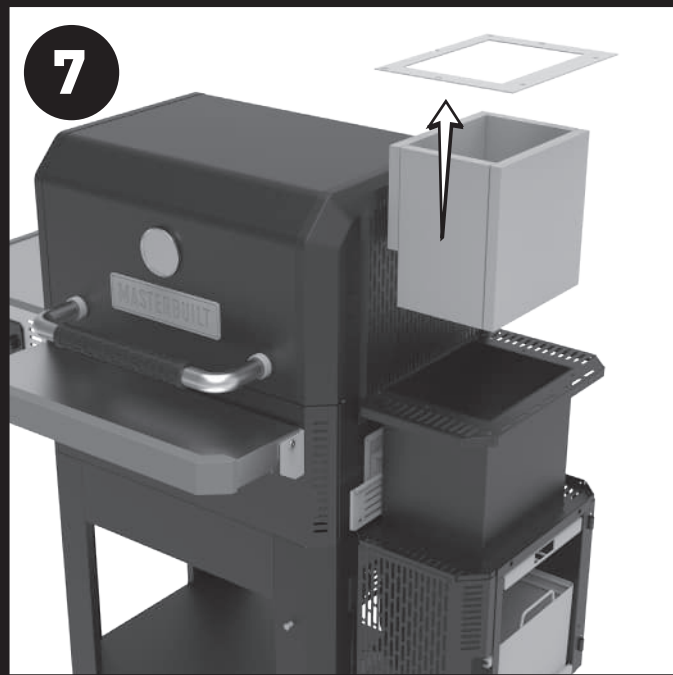

Remove hopper gasket and fire bricks.



Remove Ash Grate.

Replace the Ash Grate. Reverse steps 7-1 to finish installation.

MASTERBUILT®

Masterbuilt®
Premier Specialty Brands, LLC
5367 New Peachtree Road
Suite 150
Chamblee, GA 30341
<https://www.masterbuilt.com/pages/customer-support>

Australia y Nueva Zelanda
Contacte a su distribuidor si desea asistencia.

Masterbuilt®
Kamado Joe Europa
Lange Voorhout 86,2514 EJ
Den Haag, Países Bajos
<https://international.masterbuilt.com/pages/customer-support>

Masterbuilt®
Kamado Joe UK Limited
Cheyenne House
West Street, Farnham, GU9 7EQ
<https://international.masterbuilt.com/pages/customer-support>