

# MASTERBUILT®

## Hard Fire Brick Replacement, Gravity Series




**CAUTION**




- Always remove plug from outlet before servicing your grill.
- Make sure your grill has fully cooled to avoid burns.
- Some components may have sharp edges. Use caution to avoid injury.

Note: your grill may look different than the pictures shown. The hopper brick replacement method is the same even if your grill looks different than the image shown.


### PARTS LIST

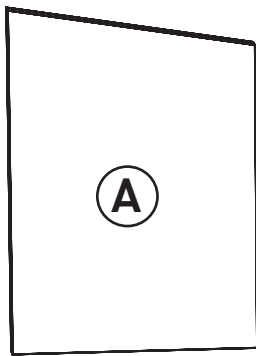


1 

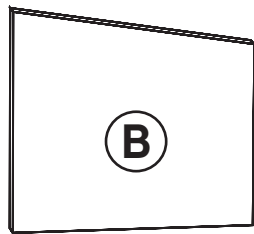

2 

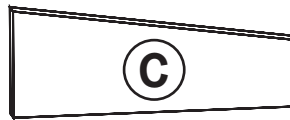


3 

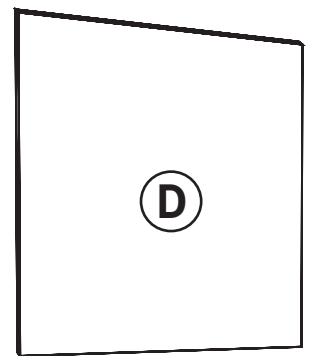


4 

1

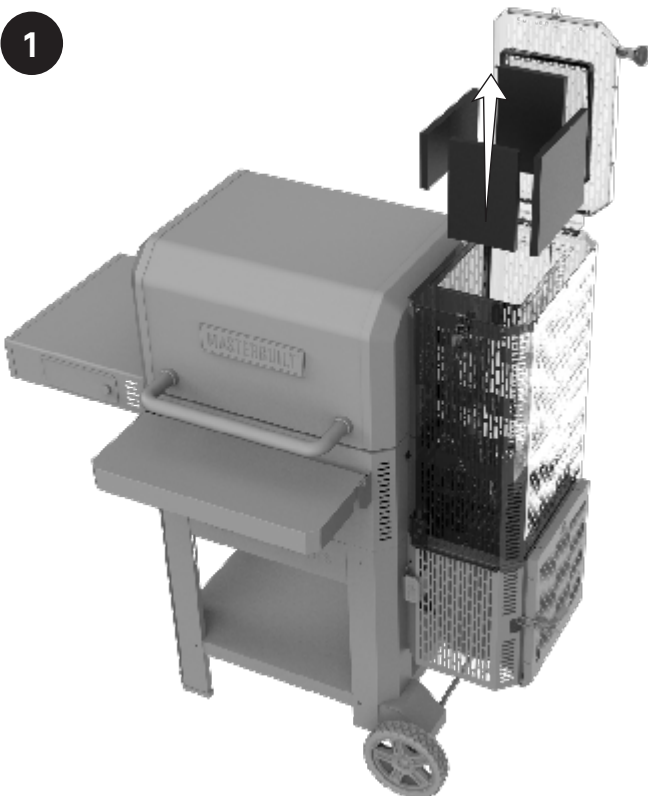


Remove all 4 firebricks from inside of the hopper.


2

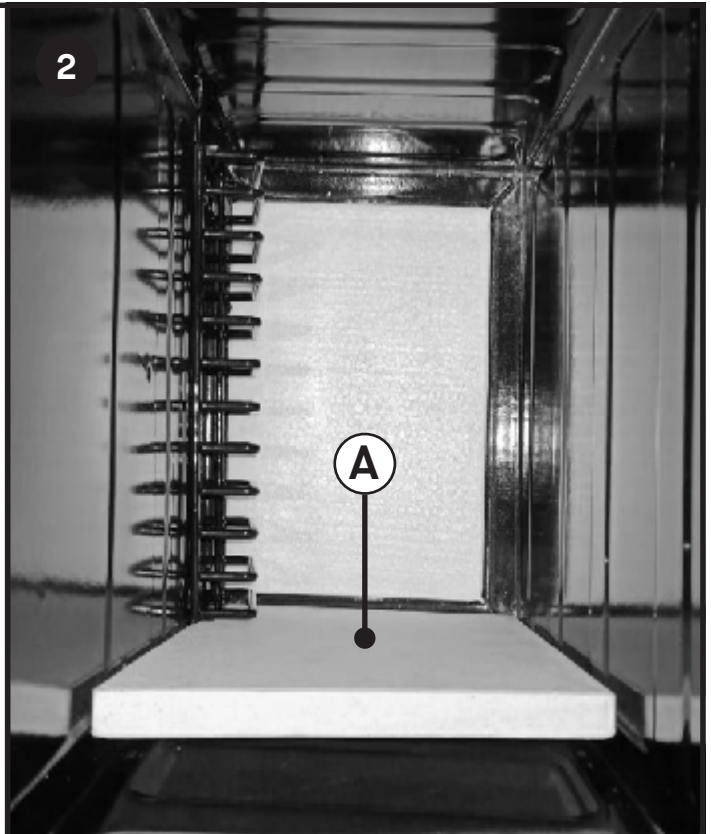


Replace panel A.

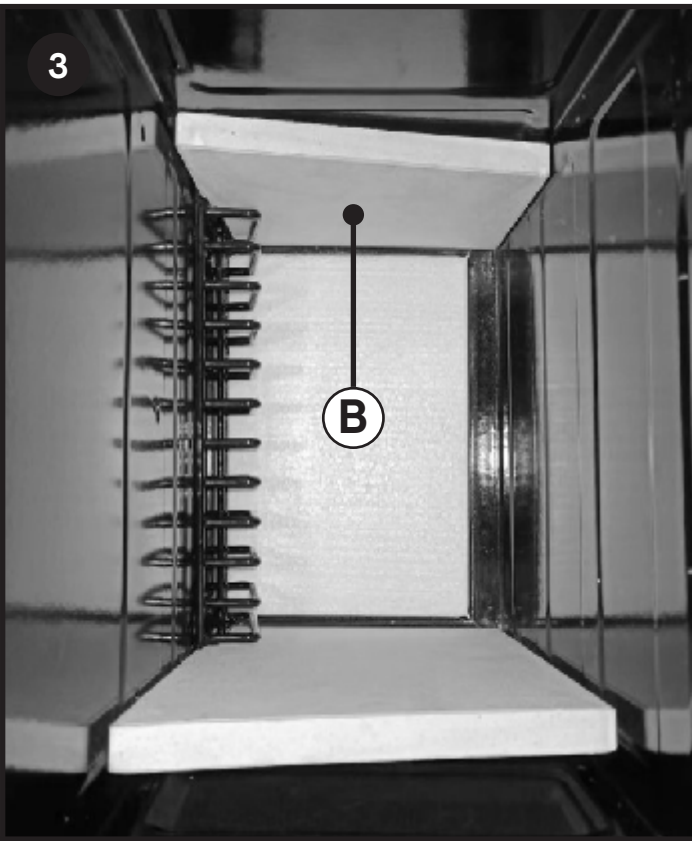


Replace panel B.

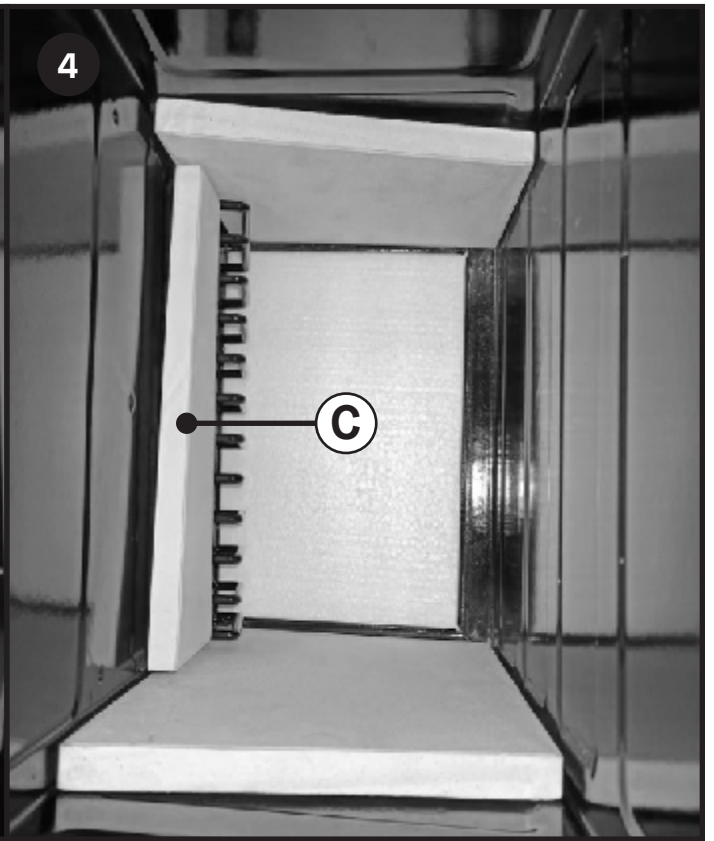

Replace panel C.

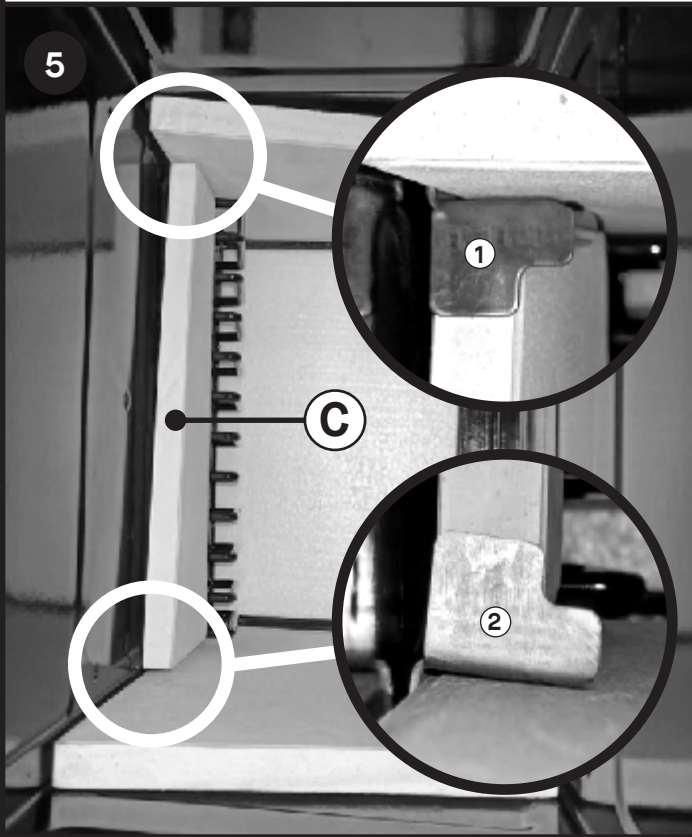

Add Bracket 1 and 2.

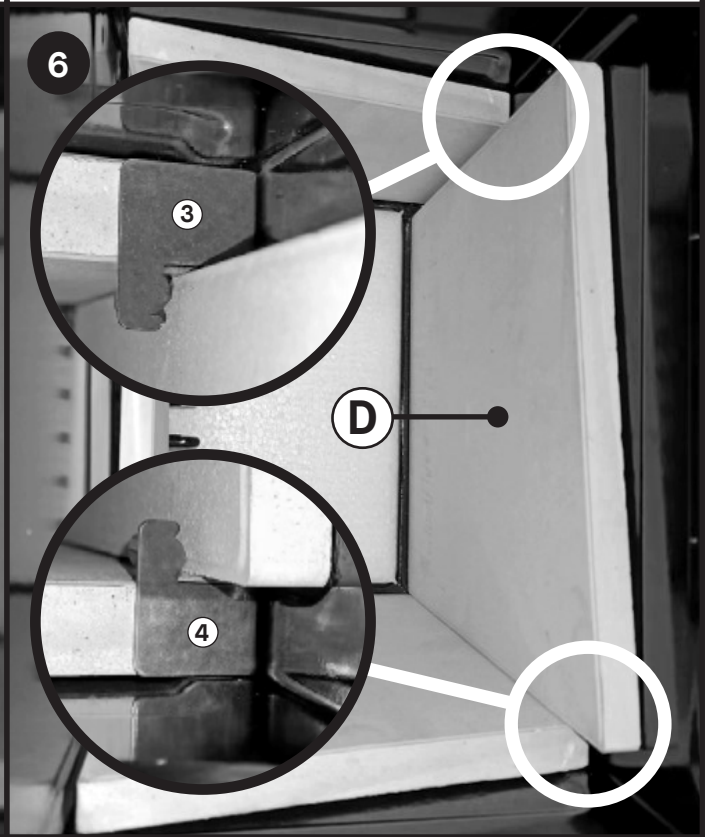

Replace panel D. Add bracket 3 and 4.