

MASTERBUILT®

GSG 1150 Temperature Probe Kit Replacement



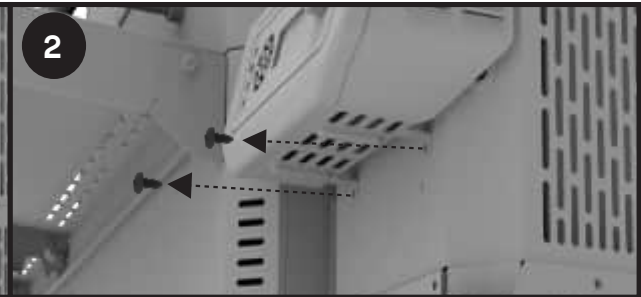
CAUTION




- Make sure the grill has cooled completely before handling to avoid burns.
- Some components may have sharp edges. Use caution and wear protective gloves to avoid injury.
- Power OFF the grill and disconnect the power from the wall before handling.




Remove the heat intake slide.








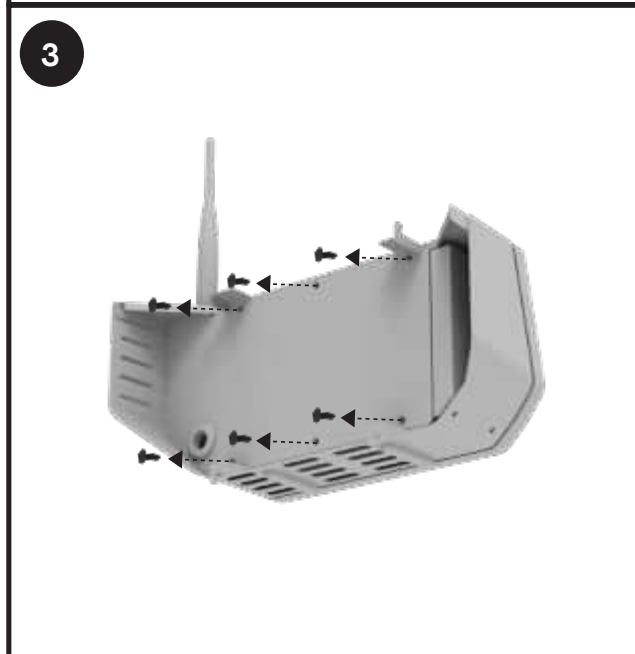
Remove 2 screws to detach the controller kit from the hopper.



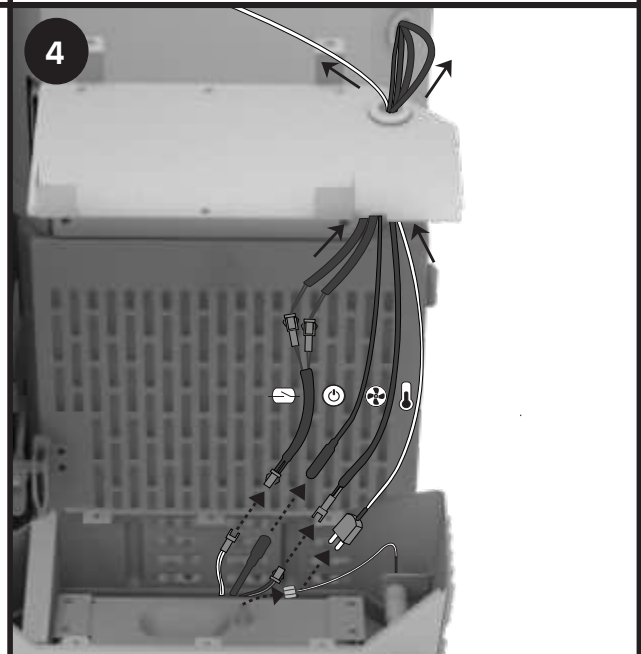Remove 6 screws from rear of the controller kit to open the back panel.



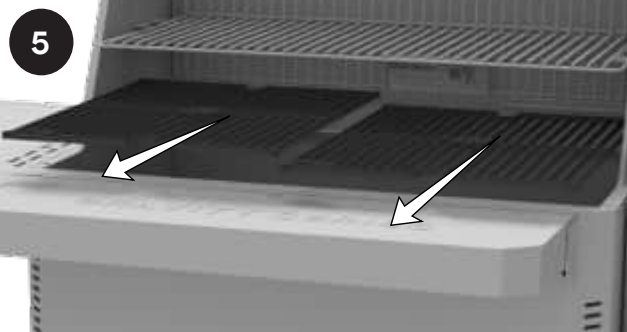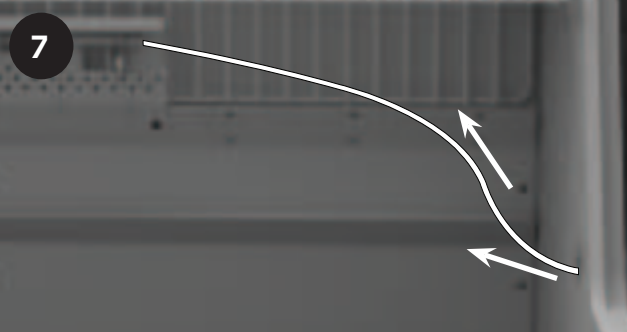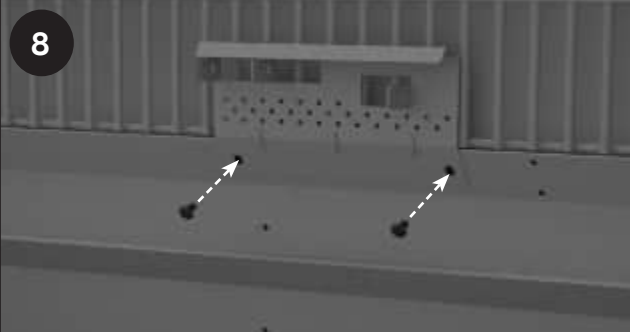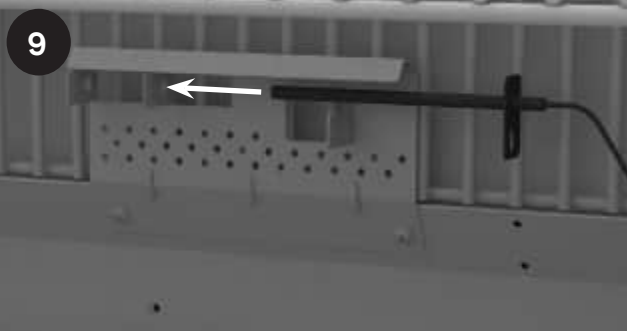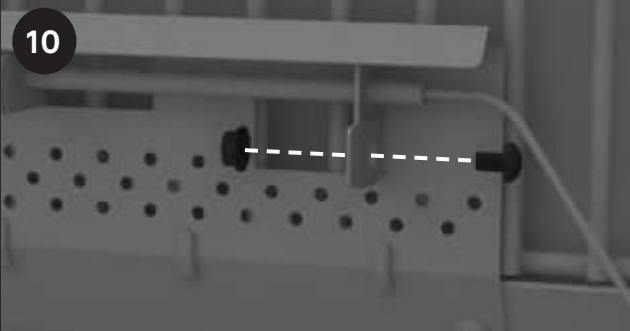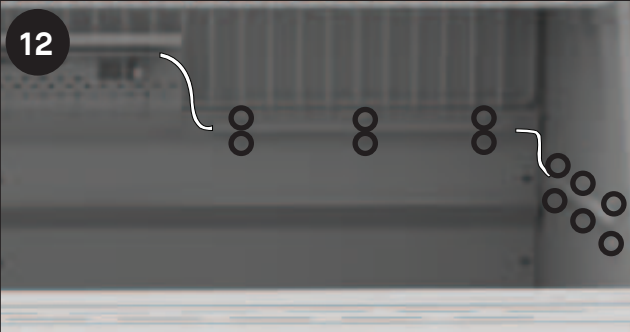Disconnect the 4 wires and pull them out of the hole.

	
Remove the grill grates.	Remove 14 screws to remove the 3 plates.
	
Pull the temperature probe wire out of the hole to remove the failed temperature probe kit.	Install new plate with 2 screws.
	
Insert new temperature probe into the hole.	Fix the new temperature probe with a screw and nut.
	
Put the temperature probe wire into the hole.	Reinstall the 2 plates with 12 screws and put the wire in place. Repeat the steps in reverse order to install the new probe.